

**Performance of No Man's Land 20 gauge
'BBB-Buck' buckshot
in Bare 10-percent ballistic gelatin**

Brass Fetcher Ballistic Testing

John Ervin

20 December 2010

Summary

	Shot 1	Shot 2	Shot 3
Calibration depth (Inches, corrected to 590 ft/sec impact velocity) (Ideal gelatin block penetration depth = 3.4")	3.7		
Impact velocity (Measured at 7ft) (ft/sec)	1210		
Median Penetration Depth (inch)	8.5		

Notes :

Weapon – Mossberg 20 gauge *Model 500*; 18.5" barrel length, cylinder choke

Distance – 10.0 feet, muzzle to impact face

Shot 1

Block Calibration Velocity (ft/sec)	Block Calibration Depth (inch)	Block Calibration Temperature (Degrees Fahrenheit)	Block Core Temperature (Degrees Fahrenheit)
588	3.9	42.1	41.5

Impact Velocity (ft/sec)	Deepest Penetration Depth (inch)	Maximum Crack Diameter (inch)	Maximum Crack Diameter Location (inch)
1210	11.1	3.5	2.5

Cavitation Depth (inch)	Pellets Recovered Independent of the primary cavity (quantity)	Pellet Combined Surface Area Independent of the primary cavity (square inch)
7.6	40	1.04

Test site conditions – 69 degrees Fahrenheit, 81% relative humidity

Time out of refrigeration prior to shot impact – 4 minutes

Figure 1. Side view of **Shot 1** gelatin block

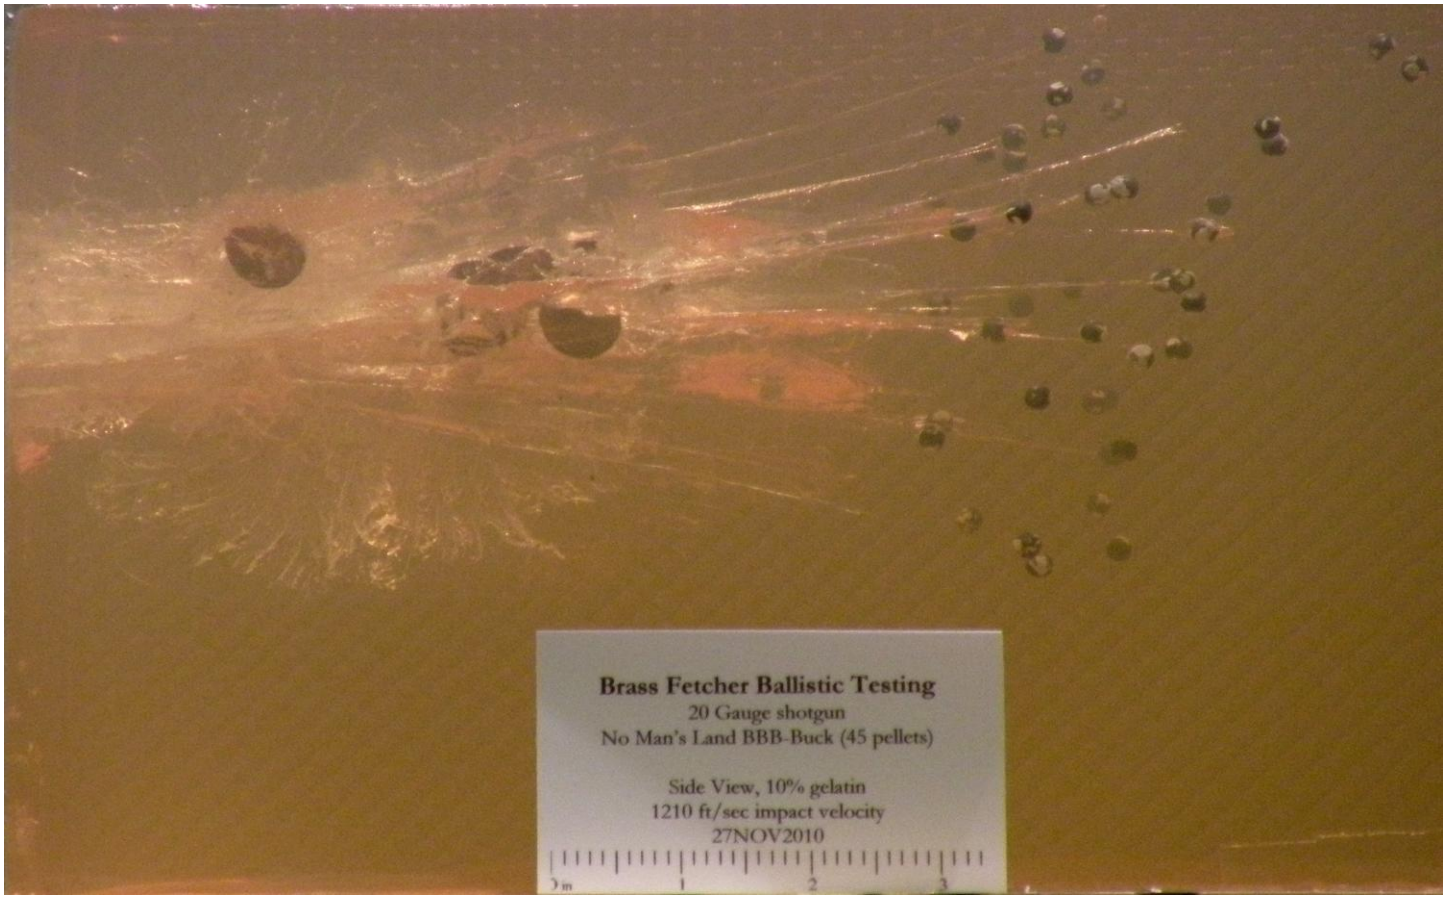


Figure 2. Top view of **Shot 1** gelatin block

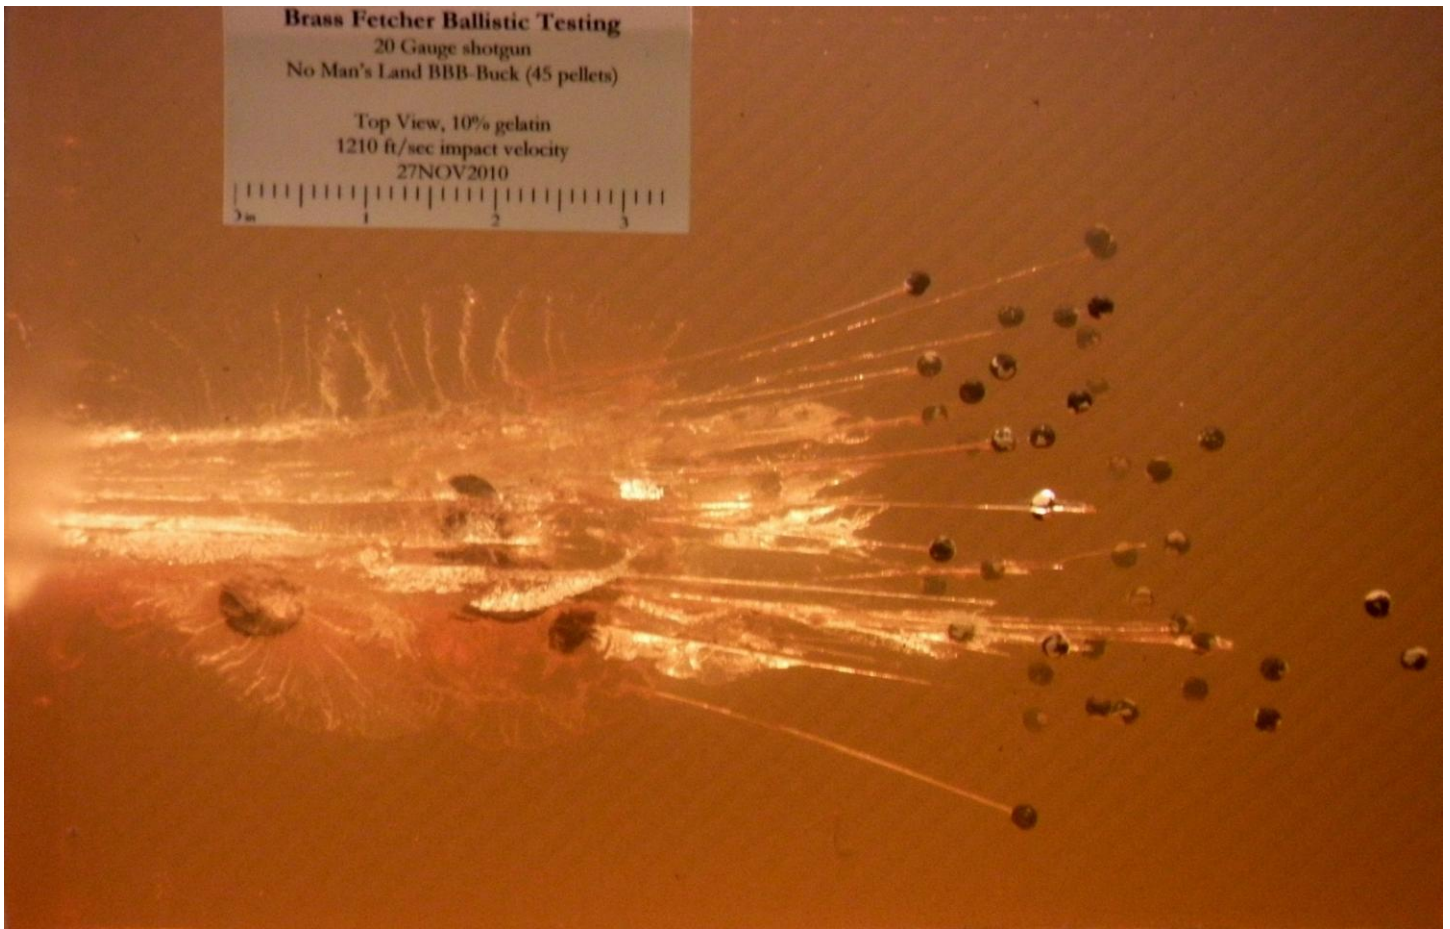


Figure 3. Fragment view of **Shot 1** recovered shot pellets

